




SUC200

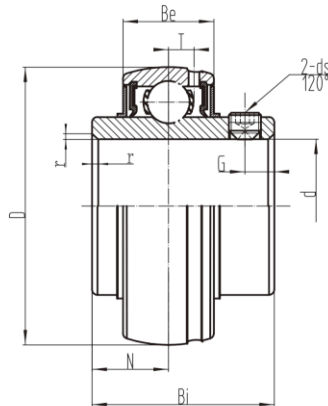

B-type Seal



L3-type Seal

轴承型号 Bearing No.	轴径 Bore Dia		外形尺寸 (毫米) Dimensions (mm)								额定 动负荷 Basic Load Rating (kN)	额定 静负荷 Basic Static Load Rating (kN)	重量 Weight (kg)	
	d		D	Bi	Be	r	N	M	G	ds				T
	in	mm												
SUC201S SUC201-8S SUC202S SUC202-10S SUC203S SUC203-11S	1/2 5/8 11/16	12 15 17	40	26	15	1	10	16	4		3.5	7.65	3.60	0.12 0.12 0.11 0.11 0.10 0.10
SUC201 SUC201-8 SUC202 SUC202-10 SUC203 SUC203-11 SUC204 SUC204-12	1/2 5/8 11/16 3/4	12 15 17 20	47	31	16(420) 17(440)	1	12.7	18.3	4.7		4.0	10.37	5.08	0.21 0.20 0.19 0.19 0.18 0.18 0.16 0.16
SUC205 SUC205-14 SUC205-15 SUC205-16	7/8 15/16 1	25	52	34.1	17	1.5	14.3	19.8	5		4.2	11.31	6.00	0.19 0.22 0.20 0.19
SUC206 SUC206-17 SUC206-18 SUC206-19 SUC206-20	1-1/16 1-1/8 1-3/16 1-1/4	30	62	38.1	19	1.5	15.9	22.2	5		5.0	15.81	8.64	0.31 0.36 0.34 0.32 0.31
SUC207 SUC207-20 SUC207-21 SUC207-22 SUC207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	72	42.9	20	2.0	17.5	25.4	7		5.7	20.83	11.68	0.46 0.52 0.50 0.48 0.46
SUC208 SUC208-24 SUC208-25	1-1/2 1-9/16	40	80	49.2	21	2.0	19.0	30.2	8		6.3	23.55	13.60	0.63 0.68 0.64
SUC209 SUC209-26 SUC209-27 SUC209-28	1-5/8 1-11/16 1-3/4	45	85	49.2	22	2.0	19.0	30.2	8		6.3	26.35	15.60	0.70 0.78 0.74 0.70
SUC210 SUC210-29 SUC210-30 SUC210-31 SUC210-32	1-13/16 1-7/8 1-15/16 2	50	90	51.6	24	2.0	19.0	32.6	10		6.6	28.48	18	0.78 0.89 0.85 0.80 0.78
SUC211 SUC211-32 SUC211-33 SUC211-34 SUC211-35	2 2-1/16 2-1/8 2-3/16	55	100	55.6	25	2.5	22.2	33.4	10		7	35.28	22.4	1.07 1.22 1.18 1.10 1.05
SUC212 SUC212-36 SUC212-37 SUC212-38 SUC212-39	2-1/4 2-5/16 2-3/8 2-7/16	60	110	65.1	27	2.5	25.4	39.7	10		7	42.5	26.34	1.52 1.65 1.55 1.49 1.42
SUC213 SUC213-40 SUC213-41	2-1/2 2-9/16	65	120	65.1	30	2.5	25.4	39.7	10		8.5	46.5	30.4	1.80 1.88 1.80
SUC214 SUC214-42 SUC214-43 SUC214-44	2-5/8 2-11/16 2-3/4	70	125	74.6	30	2.5	30.2	44.4	12		8.9	50.15	33.6	2.06 2.10 2.08 2.07
SUC215 SUC215-45 SUC215-46 SUC215-47 SUC215-48	2-13/16 2-7/8 2-15/16 3	75	130	77.8	32	2.5	33.3	44.5	12		9.2	53.55	37.6	2.19 2.41 2.31 2.21 2.11
SUC216 SUC216-50	3-1/8	80	140	82.6	33	3	33.3	49.3	14		9.6	58.65	40.8	2.82 2.90
SUC217 SUC217-52	3-1/4	85	150	85.7	35	3	34.1	51.6	14		10.5	68	48.8	3.46 3.56
SUC218 SUC218-56	3-1/2	90	160	96	37	3	39.7	56.3	15		11	77.52	54.56	4.53 4.62